



FRONTLINE COVERS THE FULL CIRCLE OF APPLICATIONS ACROSS ALL INDUSTRIES

Bell, Scott & Company Ltd,
Engineering & Industrial Suppliers



LUBRICANTS & SEALANTS

ROCOL
Foliac Super Red



Rocol Foliac Super Red pipe jointing compound is a thin, easy to apply, hard setting compound, specially developed for sealing of gearboxes, gear cases and where oil resistant joints are required. The resultant film is also designed to withstand expansion, contraction and vibration. Primarily for petrol, diesel, fuel oils, mineral oils, gases, air and water.

- Temperature range –20C to 250C
- Suitable for pressures up to 150 psi (10 bar)
- Pressure test after a minimum 24 hours
- Sets hard but flexible
- Resists vibration and thermal expansion

Item #	Size
R30051	375gm

ROCOL
Foliac Manganese



Foliac Manganese pipe jointing compound is designed for where there is a need for stronger joints to be made, and also resistance to higher temperatures and pressures. Rocol Manganese pipe jointing compound dries harder than graphite compounds.

- Temperature range –20C to 600C
- Suitable for pressures up to 2800 psi (193 bar)
- Pressure test after a minimum 24 hours
- Sets hard but flexible
- Resists vibration and thermal expansion

Item #	Size
R30042	400gm

ROCOL
Foliac Graphite



Foliac Graphite pipe jointing compound is a dark grey compound, for a wide range of pipe, flange and face joints. It dries slowly but never completely sets, it is therefore easy to strip and clean from surfaces before reassembly.

- Temperature range –20C to 450C
- Suitable for pressures up to 1400 psi (97 bar)
- Pressure test after a minimum 24 hours
- Sets semi-hard but flexible
- Resists vibration and thermal expansion
- Easy to break and clean joints

Item #	Size
R30022	375gm

ROCOL
FFL Dry PTFE Spray



Rocol dry PTFE spray multi purpose, food grade PTFE spray for light lubrication. Non-toxic PTFE spray for use as a dry anti-stick film or light lubrication of links, pins, chutes, slides etc. operating in food/clean environments.

- Temperature range –2000C to 2700C
- Light film – does not easily transfer
- Effective anti-stick properties
- Insoluble in water and solvents
- Clean, dry, non-toxic, colourless film
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570
- NSF H1 registered – 123703
- DIN V 10517N

Item #	Size
R34235	400ml



ROCOL
Leak Detector Spray



Leak Detector spray efficiently identifies the location of potentially dangerous gas leaks. Suitable for use on most positive pressure gas systems. This specially formulated fluid is designed specifically to identify even the smallest, positive pressure, gaseous leak.

- Leak detector spray leaves a thin uniform film of surface active agents that accurately identify any leaks or bleeding of joints.
- Suitable for use with most gases
- Low chlorine content to ensure maximum plastic compatibility
- Compatible with most metals and plastics
- Aerosol enables fast and easy application
- Convenient and accurate in difficult to reach areas
- No wastage or spillage
- For use by registered gas Installers

Item #	Size
R32030	300ml

FLEXITALLIC
PTFE Tape



Flexitallic PTFE Tape.


- Used for sealing screw threads in pipework
- Suitable for water and steam, low coefficient of friction
- Conforms to BS7786

Flexitallic Gas Tape.

- Used for all common gases and liquids
- 50% overlap for BS21 threads up to 50mm
- Conforms to BS7786

Item #	Size	Details	Type
88010	12mm x 0.075mm	12M Spool 36g/m	PTFE
88015	12mm x 0.2mm	5M Spool 150g/m	Gas

ROCOL
Gasseal

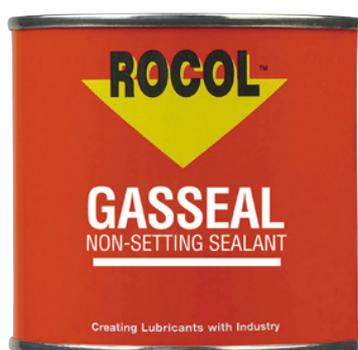

Rocol gasseal non setting pipe sealant for metallic threaded joints. Primarily for liquefied petroleum gases (LPG), natural gas, air and water.

- Temperature range: -200C to 1250C
- Suitable for low pressure 2.9 psi (0.2 bar) L.P.G. and natural gas
- Independently tested by BSI to BS EN 751-2
- Joints can be assembled and pressure tested immediately
- Non corrosive to aluminium, brass, copper, low carbon steel & zinc
- Resists vibration
- Compatible with foam forming leak testers
- Suitable for use by CORGI registered gas installers
- Not suitable for high pressure storage installations or L.P.G. in liquid form

Item #	Size
R28042	300gm



ROCOL
FoodLube Spray



Rocol foodlube spray is a high performance versatile lubricant spray food grade multipurpose lubricant spray. Non-toxic, water displacing, lubricating, penetrating lubricant with good corrosion protection. Ideal for use in food/clean environments.

- Temperature range -200C to 1100C
- Good load carrying properties (180 kg weld load)
- Good dewatering properties
- Excellent penetration
- Thin long lasting film
- Excellent corrosion protection
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570 - NSF H1 registered – 121616 - DIN V 1051717

Item #	Size
R15710	300ml

ROCOL
FoodLube Chain Spray



Foodlube Chain spray is a food grade multipurpose chain and conveyor lubricant in an aerosol. Non-toxic, water resistant lubricant designed for the effective lubrication of all types of chains and conveyors operating in food/clean environments.

- Temperature range -200C to 1500C
- Highly resistant to water wash off
- Non-drip tenacious film
- Excellent penetration
- Good load carrying capabilities
- Excellent corrosion protection
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570 - NSF H1 registered – 122878 - DIN V 10517

Item #	Size
R15610	400ml

ROCOL
FoodLube Dismantling Spray



Rocol foodlube dismantling spray is a food grade penetrating spray for effective release. Non-toxic, fast acting, penetrating lubricant providing short term corrosion protection.

- Temperature range -20°C to 110°C
- Excellent penetration of rust, scale and general grime
- Quick effective release of seized and corroded threaded fasteners
- Protective film provides short term corrosion protection
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570 - NSF H1 registered – 121617 - DIN V 10517

Item #	Size
R15720	300ml

ROCOL
Precision Silicone Spray



Precision Silicone spray is a multi purpose, food grade silicone spray for light lubrication. Non-toxic silicone spray for use as an anti-stick film or light lubrication of links, pins, chutes, slides etc. operating in food/clean environments.

- Temperature range -500C to 2000C
- Light film – does not easily transfer
- Resists oxidation and corrosion
- Excellent water and chemical resistance
- Long life lubricating film
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570
- NSF H1 registered – 123699
- DIN V 10517

Item #	Size
R34035	400ml



ROCOL *FoodLube Multi-Paste*



Foodlube Multi-Paste is suitable for use as an anti-seize, assembly paste, and for lubricating bushes, slides and small open gears in the food and other clean industries. Designed to operate across a wide temperature range and is particularly suitable for stainless steel fasteners used in high temperature applications. Available in a paste or convenient aerosol spray.

- Temperature range -30°C to +450°C
- NSF H1 Registered

Item #	Size
R15750	85gm
R15751	400ml

ROCOL *FoodLube Sugar Dissolving Fluid*



Foodlube Sugar Dissolving Fluid rapidly dissolves and removes sugar and fondant build up from most surfaces. Effectively minimises further sugar and fondant residues whilst providing a durable light lubricating film. Available in bulk or convenient trigger spray. May be diluted with water if required (maximum 1:1). NSF H1 Registered. Temperature range +5 to +95°C.

Item #	Size
R15110	500ml
R15116	5L

ROCOL *FoodLube Universal Grease*



Rocol foodlube universal grease is designed for the effective lubrication of all types of ball, roller and plain bearings operating under high loads in the food and other clean industries. Suitable for multi purpose applications and those operating at low or high temperatures, high loads and those which require high water resistance.

- Temperature range -50°C to +160°C
- NSF H1 Registered

Item #	Size
R15231	380gm
R15236	2.4kg
R15234	18kg

ROCOL *FoodLube Hi-Temp 2*



Rocol foodlube Hi-Temp 2 is a food grade white semi translucent non-toxic grease lubricant fortified with PTFE, designed for the effective lubrication and protection of ball, roller and plain bearings operating in food/clean environments operating at high temperatures.

- Temperature range -20°C to +200°C.
- Good anti-wear performance
- Highly resistant to water wash off
- Suitable for slow moving bearings and slides
- Ideal for use as a friction reducing lubricant
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA group 21 CFR 178.3570
- NSF H1 registered – 122065
- DIN V 10517

Item #	Size
R15251	380gm



ROCOL
Sapphire Aqua-Sil



Rocol Sapphire® Aqua-Sil silicone grease a non melting silicone grease for long term lubrication at extreme temperatures with good resistance to chemicals, oils, water and gases. WRC approved for hot and cold potable water. Designed for the lubrication of slow speed bearings, slides, stenter width adjustment spindles, 'o' rings etc. The grease has a high dielectric strength, is resistant to chemicals, oils and gases and can be used as an electrical insulating and filling compound.

- Temperature range -40C to 200C NLGI No 3
- Good resistance to chemicals, oils
- Does not affect most rubbers and
- Suitable for use as an electrical insulating
- Water bylaws scheme approved product for both hot and cold potable water

Item #	Size
R12251	85gm

ROCOL
Sapphire Precision Lube



Rocol sapphire precision lube is a high performance maintenance lubricant with PTFE. It is designed to provide excellent lubrication, penetration and protection in the widest range of applications. It is clean, non-toxic, highly penetrating and free from chlorinated solvents. It reduces friction in all moving parts including chains, threaded components and sliding surfaces.

- Temperature range -55C to 250C
- Outstanding EP performance (315kg weld load)
- Ultra high performance universal maintenance lubricant
- Clean non-toxic lubricating film
- Contains PTFE as a solid lubricant - reduces friction

Item #	Size
R34341	400ml

ROCOL
Sapphire Spray Grease



Rocol sapphire spray grease aerosol applied multi-functional grease for ease of application and convenience. Provides excellent lubrication and good corrosion protection over a wide temperature range -40°C to +220°C. For use on all moving parts such as sliding surfaces, bearings or wherever a bulk grease is normally used.

- Outstanding EP performance (355kg weld load)
- Sapphire premier in an aerosol can
- Suitable for use as an electrical contact lubricant
- Excellent corrosion protection
- Ideal for linear bearings

Item #	Size
R34305	400ml

ROCOL
Sapphire 2 Bearing Grease



Rocol sapphire 2 is a triple life multi-purpose bearing grease. Sapphire 2 is a long life complex soap thickened NLGI 2 grease with very high resistance to load and good corrosion resistance.

- Temperature range -30C to 150C
- Outstanding EP performance (>800kg weld load)
- Revolutionary multi-complex soap technology
- Greatly extended lubrication intervals typically 3 times longer than conventional soap thickened greases
- Good corrosion resistance
- Blue in colour for high visibility

Item #	Size
R12171	400gm
R12176	5kg
R12175	18kg
R12178	50kg



ROCOL *Sapphire Hi-Load 2*



Sapphire Hi-Load 2 is a long life multi-purpose grease containing molybdenum disulphide. Sapphire Hi-Load 2 is designed for the effective lubrication and protection of all types of ball, roller and plain bearings.

- Temperature range -30C to 150C
- Outstanding EP performance (>800kg weld load)
- Revolutionary multi-complex soap technology
- Greatly extended lubrication intervals typically 3 times longer than conventional soap thickened greases
- Good corrosion resistance
- Ideal for heavy loaded, slow moving applications

Item #	Size
R12761	400gm

ROCOL *Sapphire Aqua 2*



Sapphire Aqua 2 is a long life, water-resistant bearing grease. Designed for the effective lubrication and protection of all types of ball, roller and plain bearings particularly in wet or damp conditions. Sapphire Aqua 2 is designed to give exceptional resistance to water washout and provide a high degree of corrosion protection.

- Temperature range -20C to 150C
- Good EP performance (315kg weld load)
- Excellent resistance to water, even in submerged conditions
- Good corrosion resistance
- Provides the opportunity to prolong lubrication intervals

Item #	Size
R12751	380gm
R12755	4.5kg

ROCOL *Sapphire Hi-Pressure Grease*



Sapphire Hi-Pressure grease has exceptional load carrying capability - contains molybdenum disulphide. For the lubrication of plain bearings and slides. Temperature range -20°C to +150°C. NLGI No 2.

Item #	Size
R12013	500gm

ROCOL *Sapphire Premier*



Sapphire Premier is a long life soap thickened multipurpose EP grease fortified with PTFE designed for arduous conditions. Compatible with most plastics and rubbers, it can be used at speeds of up to 0.5 million dmN. Premier is highly thermally stable and can be used at temperatures up to 200°C. NLGI No.2 consistency for conventional application. Premier is designed for the effective lubrication and protection of ball, roller and plain bearings operating in a wide variety of applications.

- Temperature range -50C to 200C
- Outstanding EP performance (355kg weld load)
- Excellent high speed capability
- Suitable for use as an electrical contact lubricant
- Excellent corrosion protection
- Ideal for linear bearings

Item #	Size
R12471	380gm

ROCOL *Sapphire Extreme Grease*



Sapphire Extreme is a high temperature, high load, molybdenum disulphide grease designed for the effective lubrication and protection of all types of ball, roller and plain bearings, particularly in heavily loaded, high temperature applications.

- Temperature range -10C to 250C
- Good EP performance (280kg weld load)
- Excellent resistance to vibration
- Very good water resistance
- Provides long term lubrication at high temperatures
- Ideal for heavy loaded, high temperature applications

Item #	Size
R12211	400gm



ROCOL
Sapphire 1 Bearing Grease



Rocol sapphire 1 is a long life multi-purpose grease designed for the effective lubrication and protection of all types of ball roller and plain bearings particularly where where improved pumpability is required.

- Designed for the effective lubrication and protection of all types of ball, roller and plain bearings
- Temperature range -30C to 150C
- Outstanding EP performance (>800kg weld load)
- Revolutionary multi-complex soap technology
- Greatly extended lubrication intervals typically 3 times longer than conventional soap thickened greases
- Good corrosion resistance
- Blue in colour for high visibility
- Good pumpability

Item #	Size
R12614	18kg
R12608	50kg
R12609	185kg

ROCOL
HT70 High Temp Grease



Rocol HT70 High Temp grease is a synthetic lubricant which evaporates slowly without carbonising to leave a thin film of molybdenum disulphide. For use on slow running plain and anti-friction bearings subjected to high temperatures +180°C to +300°C.

Item #	Size
R12106	4kg

ROCOL
Chain & Drive Spray



Chain & Drive spray for the lubrication of chain and drive systems not fitted with automatic lubrication systems. High performance EP chain and conveyor lubricant in an aerosol. Designed to effectively displace water, penetrate, lubricate and protect against corrosion, particularly in wet and aggressive conditions.

- Temperature range -30°C to +150°C
- Outstanding EP performance (200kg weld load)
- Excellent penetration
- Tenacious water repellent film
- Excellent corrosion protection
- Applied film has good adhesion, reducing dripping or throw off

Item #	Size
R22001	300ml

ROCOL
Chain Guard Hi-Load Spray



Chain Guard hi-load spray contains molybdenum disulphide for the lubrication and protection of chain and drive systems operating under high load conditions e.g. lift truck chains etc. CFC free, non flammable propellant. High performance EP chain and conveyor lubricant with MoS₂. Designed to effectively displace water, penetrate, lubricate and protect against corrosion, particularly in wet and aggressive conditions.

- Temperature range -30°C to +180°C
- Outstanding EP performance (250kg weld load)
- Excellent penetration
- Tenacious water repellent film
- Excellent corrosion protection
- Applied film has good adhesion, reducing dripping or throw off

Item #	Size
R22141	300ml



ROCOL
Chain Guard 550



Chain Guard 550 high temperature graphited chain lubricant for use where product contamination cannot be tolerated, in chemically hostile environments and at temperatures too high for wet chain lubrication. Use for manual application.

- Temperature range: moist film -10°C to 180°C, dry film up to 550°C
- Good EP and anti-wear performance
- Dry film (above 180°C) - does not attract dust/dirt
- Excellent penetration (must be applied below 120°C)

Item #	Size
R22076	5L

ROCOL
Anti Seize Spray




Anti Seize is a copper based spray for all static fasteners and mechanisms. Anti seize spray is an assembly and anti seize lubricant that prevents pick up and seizure even in wet, dirty and corrosive conditions.

- Temperature range -10°C to 1100°C
- Prevents pick up and seizure of static threaded fasteners
- Lubricates, protects and eases dismantling
- Effective even in the most aggressive environments
- Insoluble in water
- Ideal for furnaces, exhaust systems, dockside and oil rig applications
- Aerosol applied for convenience and economy

Item #	Size
R14015	400ml

ROCOL
Wire Rope Dressing

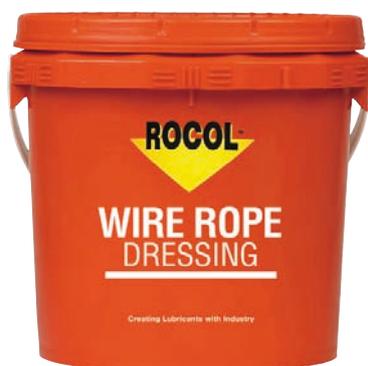

Wire Rope Dressing is a high performance, semi-fluid wire rope lubricant. Containing a unique combination of lubricating solids. It is totally water repellent, cannot emulsify in water and, due to its nontacky nature, will prevent build up of dust and contaminants on the rope. Used successfully on hoists, drag lines, cranes and ships, particularly in areas where salt water, dust, sand, effluent or other hostile conditions prevail.

- Temperature range -300C to 1000C
- Excellent internal and external wear protection
- Excellent internal and external corrosion protection
- Withstands extreme wet / corrosive conditions
- High performance - ensures extended relubrication intervals
- Thin film keeps ropes clean from dust and dirt and are cleaner to handle
- Does not drip or fling off
- Also suitable as a gearbox grease for slow moving, highly loaded boxes

Item #	Size
R20015	400ml
R20026	4kg
R20024	18kg

ROCOL
J166 - Anti Seize Compound



Anti-Seize Compound - J166 a copper based anti seize paste for all static fasteners and mechanisms. Anti seize compound is an assembly and anti seize lubricant that prevents pick up and seizure even in wet, dirty and corrosive conditions.

- Temperature range -100C to 11000C
- Prevents pick up and seizure of static threaded fasteners
- Lubricates, protects and eases dismantling
- Effective even in the most aggressive environments
- Insoluble in water
- Ideal for furnaces, exhaust systems, dockside and oil rig applications

Item #	Size
R14033	500gm
R14035	6kg



ROCOL
Penetrating Spray



Penetrating Spray is a powerful penetrating fluid, with molybdenum disulphide, in an aerosol. A powerful jet application of lubricant that penetrates to give quick and effective release of corroded threaded fasteners or similar seized components. It contains molybdenum disulphide, to aid disassembly, and corrosion inhibitors to provide a protective film against further corrosive attack.

- Excellent penetration of rust, scale, grease, oil etc.
- Molybdenum disulphide aids dismantling
- Protective film provides short term corrosion protection
- Fast acting performance for the quick effective release of all seized metal parts

Item #	Size
R14021	300ml

ROCOL
Cold Galvanising Spray



Cold Galvanising spray is a zinc rich corrosion protective for long term protection of metal components requiring a permanent coating. For use where more sophisticated plating and coating methods are not justified on cost grounds, or for those large components that cannot be corrosion protected using a heat treatment process. It can also be used to repair the surface of galvanized components that have been damaged or scratched.

- Rapid drying
- Smooth coating - will not crack or split even when deliberately flexed
- Dry film - does not attract dirt and dust
- Long term corrosion protection of metal components requiring a permanent coating

Item #	Size
R69515	400ml

ROCOL
MT-LM Assembly and Run-In Paste



MT-LM Assembly and running-in paste is an assembly lubricant for precision and interference fit parts. Provides a tough, wear resisting, greasy film which provides anti-seize protection, eases assembly and provides complete protection during the critical start up and running in periods. Ideal for assembling plain bearings, pins, slides and gears etc. Also the lubrication of valves and slow moving parts under high loads.

- Temperature range -500C to 4500C
- Reduces forces required for assembly
- Guards against galling and pick up
- Protects during start up and running in
- Guards against wear and fretting corrosion

Item #	Size
R10056	750gm

ROCOL
Heavy Duty Rustshield



Heavy Duty Rustshield is a thin, dry film, corrosion preventative suitable for the temporary outdoor protection of all machined or pressed steel components. It provides protection for extended periods out of doors, in transit and indoors under severe conditions. It also provides residual lubrication for assembly etc.

- Effective outdoor corrosion protection
- Mild dewatering action
- Dry film - does not attract dirt and dust
- Temperature range -20 to +110°C

Item #	Size
R69100	300ml



ROCOL
Z30 Spray



Rocol Z30 spray is a specially formulated long term corrosion protective lubricant designed for the harshest conditions. Z30 dries to leave a waxy protective film that will displace moisture and lubricate. Ideal for machinery, elevators, fork-lift truck and off-shore platforms;

- Temperature range –200C to 1100C
- Heavy duty, waxy film for long term corrosion protection
- Excellent corrosion protection outdoors for up to 2 year
- Good dewatering properties
- Good penetration
- Can provide a light lubricating film in some applications
- Ideal for outdoor corrosion protection of exposed metal parts
- Does not contain silicones or chlorinated solvents

Item #	Size
R37020	300ml

ROCOL
Belt Dressing Spray



Belt Dressing spray is a colourless, adhesive spray for the efficient treatment of most belt types. Non-toxic adhesive spray conditions belts to prevent drying out and adheres strongly to any belt material giving instant grip.

- Temperature range –500C to 1000C
- Conditions belts – prevents drying out
- Reduces belt slip – aids transmission efficiency
- Effective in damp conditions
- Prolongs belt life - prevents glazing
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570
- NSF H1 registered – 123700
- DIN V 10517

Item #	Size
R34295	300ml

CHEMICO
Denso Tape




Denso tape has been the versatile answer to all kinds of anti-corrosion and sealing problems for over sixty years including the protection of above and below ground steel.

- Manufactured to a system which complies with BS.En.ISO 9002 1994.

Item #	Size
88310	1"
88320	2"
88330	3"

ROCOL
Dry Moly Spray

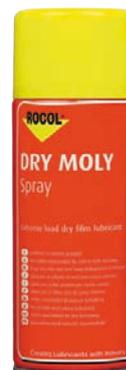

Dry Moly spray is an anti-suffing lubricant that withstands high loads and temperatures up to +450°C. resin bonded, dry film coating of molybdenum disulphide in aerosol. Developed to lubricate sliding mechanisms such as plain bearings, pins, cams and slides where a wet lubricant cannot be tolerated.

- Temperature range of applied film -200°C to +450°C
- Dry film lubrication - resists pick up of contaminants
- Prevents galling, pick up and seizure
- Resistant to high loads (up to 7,000 kg/cm²)
- Excellent wear resistance (high molybdenum disulphide content)

Item #	Size
R10025	400ml



ROCOL
Dry Moly Paste/ASP



Dry Moly paste/ASP is a dry film coating of molybdenum disulphide in paste form. Developed to lubricate sliding mechanisms such as plain bearings, pins, cams and slides where a wet lubricant cannot be tolerated. Applies an almost dry film for surface lubrication of moving parts. Resists high loads and temperature -50°C to +450°C.

- Dry film lubrication - resists pick up of contaminants
- Prevents galling, pick up and seizure
- Resistant to high loads (up to 7,000 kg/cm²)
- Excellent wear resistance (high molybdenum disulphide content)

Item #	Size
R10040	100gm
R10046	700gm

ROCOL
Ultraglide Spray



Rocol ultraglidespray is specially designed to overcome “stickslip” phenomena and provide smooth and precise movement of machine tool slideways, collets and chucks. The extreme pressure agents and anti-wear additives reduce wear, while the adhesive qualities of the lubricant reduce draining to a minimum, ensuring effective performance over a long period of time.

- Outstanding Features
- Resists washing action of coolant and protects against corrosion
- Provides lasting lubrication
- Clings to vertical faces, and does not fling off rotating parts

Item #	Size
R52041	400ml

ROCOL
Electra Clean Spray



Electra Clean spray is ideal for electrical and electronic fine parts. Cleans and degreases delicate mechanisms. Removes light greases, oils, dirt and organic soils. Quick evaporation. Safe to use on most surfaces. Non conductive. Fast penetration. Superior wetting action. No rinsing. Non-toxic fast drying solvent leaving no residue to affect conductivity. Ideal for electrical equipment including contacts, motors and switches.

- Cuts through dirt, grease and grime - fast
- Rapid drying – leaves no residue to affect conductivity
- Compatible with most commonly used plastics
- Suitable for food/clean environments
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570
- NSF K2 registered – 124471

Item #	Size
R34066	300ml

ROCOL
Foam Cleaner Spray



Foam Cleaner spray is a highly versatile, fast acting foaming cleaner.

- Non-toxic blend of surfactants for effective removal of dirt, grease and grime from a wide variety of non-porous surfaces
- Cuts through dirt, grease and grime - fast
- Foaming action ensures long contact time for effective cleaning
- Ideal for all non-porous surfaces
- Suitable for food/clean environments
- Does not contain: mineral hydrocarbons, animal derived materials, nut oils or genetically modified ingredients
- FDA Group 21 CFR 178.3570

Item #	Size
R34141	400ml



ROCOL *Heavy Duty Cleaner Spray*



Heavy Duty Cleaner spray lifts grease and grime so that the resulting residue can be easily removed.

- Slow evaporation
- Safe on metals, most plastics and paints
- Water emulsifiable
- Inverts spray valve

Item #	Size
R34011	300ml

ROCOL *Industrial Cleaner Rapid Dry Spray*



Industrial Cleaner rapid dry multi-purpose, fast drying, degreaser that leaves no residue. A specially formulated blend of degreasing solvents designed to remove grease, oil and general workshop grime rapidly from a wide range of surfaces. Ideal for use where a fast drying non-chlorinated solvent cleaner is required, particularly if a clean residue free surface is essential.

- Extremely powerful cleaning solvent
- Evaporates quickly, dries in seconds and leaves no residue
- Does not contain chlorinated solvents
- Available in convenient aerosol form

Item #	Size
R34131	300ml

ROCOL *Tufgear Spray*




Rocol tufgear spray is a high performance open gear lubricant in aerosol form. High viscosity, non-melting lubricant containing a blend of high load solids to give increased anti-pitting and load carrying characteristics. Rocol tufgear spray has excellent corrosion resistance and is designed for long life operation in all environments.

- Temperature range -100C to 1000C
- Outstanding EP performance (800kg weld load)
- Thin tenacious film
- Does not attract dust and dirt
- Withstands wet condition

Item #	Size
R18105	400ml

ROCOL *WD Spray*

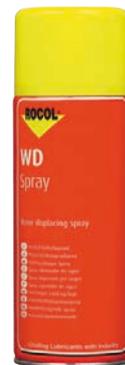

Rocol WD spray is a multi-purpose product that displaces water, penetrates to release corroded parts, provides light lubrication and leaves a corrosion resistant film. Particularly suitable for the protection and the drying out of engine ignition systems, coils, distributors, H.T. leads, spark plugs etc.

- Excellent penetration and release of seized fasteners
- Good lubricating properties
- Displaces water - particularly suited for drying out engine ignition systems
- Provides a good, corrosion protective film

Item #	Size
R34271	300ml



PRESSOL
Pressol Multipurpose Grease



Multipurpose grease for friction and anti-friction bearing lubrication at high power drive, DIN 1284, NLGI-grade 2.

- Temperature range -30°C to +80°C - dropping point >190°C
- Waterproof
- Acid free

Item #	Size
28025	400gm

PLUS GAS
Dismantling Lubricant



PlusGas Formula 'A' is no ordinary penetrating oil. Faster, safer and more powerful than any other lubricant.

- PlusGas penetrating oil used by aircraft, railway and automotive engineers, mechanics, maintenance, repairmen, plumbers, builders, carpenters and locksmiths
- PlusGas penetrates and releases rusted nuts, bolts and metal in the home, on cars, trucks, motorcycles, bikes, boats, aircraft, lawnmowers, cranes, pumps, compressors, boilers, generators and wherever metal won't move

Item #	Size
84210	200ml
84215	400ml

WD-40
Spray Lubricant



Maintains, protects and cleans. Penetrates to free up frozen or rusted metal parts and fasteners. Lubricates joints on all tools. Cleans and displaces moisture on electrical tools. Stops squeaks, drives out moisture. Will loosen rusted parts, frees sticky mechanisms, gets under water, drives it off and keeps it off.

- A non-conductor and can be used to dry out electrical and electronic equipment
- Silicone-free, which means no messy, gummy residue
- Removes grease, grime, tar, adhesives, gum, crayon, water deposits and more

Item #	Size
84402	250ml
84406	450ml
84409	5L



ROCOL *Reaming Threading Drilling Lubricant*



Rocol RTD is the world leading hand applied lubricant for reaming, tapping & drilling operations. RTD technology has been successfully serving industry for over 40 years. RTD gives the user the performance and reliability associated with every Rocol product.

- Available in liquid, paste & aerosol
- Suitable for severe cutting operations
- Extends tool life -high EP levels
- Reduces production costs
- Applied directly to tap/via automatic CNC applicator
- Rolls Royce approved - Spec CSS 137
- Non staining on yellow metals & aluminium
- Reduce heat / friction - promoting excellent surface finish
- Reduce wear - flow direct to the cutting edge

Item #	Size
R53072	400gm
R53076	5L
R53011	300ml
R53023	500gm
R53026	5kg

ROCOL *RTD Cleancut*



RTD Cleancut is a specially formulated, hand applied cutting lubricant designed to improve all day to day machining operations. The low viscosity of RTD Cleancut means that it penetrates quickly, ensuring lubrication at the cutting edge to improve both tool life and surface finish.

- Can be used on a wide range of non-ferrous and ferrous metals, including copper, brass and aluminium, without the risk of staining
- Oil-free so problems of excessive fuming often associated with oil-based products are overcome,
- Sulphur and chlorine free tapping fluid
- Extends tool life
- Improves surface finish
- Can be cut back with water - greater economy
- Compatible with water mix cutting fluids

Item #	Size
R53062	350gm
R53066	5L

TREFOLEX *Cutting Compound*



Cutting compound for metals and plastics, Relied on by generations of engineers.

- Manufactured to an advanced high performance formula that is both hazard free and harmless to the environment
- A viscous paste that eases the use and can reduce the breakage and wear of portable hand cutting tools
- Recommended for applications involving the use of taps, dies, drills, hacksaws, reamers and all hand tools designed for working on metals and plastics

Item #	Size
84310	500gm

ROCOL *Ultraguard BX*



Rocol ultraguard BX is a biocide additive that can be safely used with all mineral soluble, semi-synthetic and synthetic water mix metalworking fluids. It is designed to give long lasting protection against bacterial activity and thus maintain fluid efficiency, improve working conditions and reduce operating costs.

- Broad spectrum activity
- Simple and easy to use
- Reduces disposal and fluid replacement costs
- Eliminates objectionable odours due to microbial growth

Item #	Size
R52084	1L



ROCOL
Flawfinder



The flawfinder system is a non destructive dye penetrant crack detection system. The benefits of the flawfinder system include:

- Industrially recognised NDT system
- Portable and simple to use

Flawfinder cleaner spray fast drying, no residue cleaner. Cuts through dirt, grease and grime- fast zero residue. Prepares surface for non destructive testing.

Flawfinder dye penetrant spray precision crack detection penetrant. Bright red even film, highly sensitive dye. Water washable.

Flawfinder developer spray precision crack detection developer. Highly absorbent white film for rapid results, highlights very fine cracks, sharp indication and geometry of defect to the naked eye.

Flawfinder kit

Comprises the cleaner, penetrant and developer spray in a convenient carry pack.

Item #	Size	Type
R63125	300ml	Cleaner
R63135	400ml	Developer
R63151	300ml	Dye Penetrant
R63181	3 Pce	Kit

ROCOL
Metal Layout Ink



Layout Ink is a specialised paint designed for the marking out of metal surfaces in toolrooms, Machine shops etc. The thin, dry film enables clear, sharply defined lines to be scribed on most surfaces without flaking.

- Outstanding features
- Allows clear, sharp definitions
- Will not chip or flake
- Resists wash off, ie. water mix cutting fluids
- Easy to apply and remove
- Blue for bright surfaces, white for dark surfaces

Item #	Size	Colour
R57025	400ml	White
R57015	400ml	Blue
R57034	1L	Blue

ROCOL
Spatter Release Fluid



Spatter Release oil free has been formulated to allow easy removal of weld spatter from metal surfaces, nozzles, jigs and fixtures when the presence of oil cannot be permitted.

Outstanding Features

- Does not affect any subsequent galvanising or painting operations
- Components can be painted without degreasing
- Will not interfere with weld formation
- Ideal for use on stainless steel where oil based products cannot be used

Item #	Size
R66070	500ml

ROCOL
Spatter Release Spray



Spatter Release spray - triple coverage non flammable spatter release. One pass coating film allows multiple welds. Formulated to allow easy removal of weld spatter from metal surfaces, nozzles, jigs and fixtures.

- Heat resistant barrier film that prevents the adhesion of weld spatter
- Non silicone – does not affect subsequent galvanising or paint operations
- Will not interfere with weld formation
- Non corrosive
- Easy cleaning
- Rolls Royce approved - Spec CSS 196

Item #	Size
R66080	300ml



ROCOL *Mould Release Spray*



Rocol Mould Release spray is designed to give fast, efficient and clean release with faithful reproduction of the mould profile however complex the mould or minute the detail. Suitable for use on all plastic and rubber mould tools including injection, compression and blow mouldings. Rocol mould release spray penetrates and spreads to all parts of the most intricate moulds to give full, clean release whilst the dry film will not affect profiles or interfere with precision fits. Applied film has excellent adhesion, is non-staining, will not transfer to product and can be safely used without fear of blemish or any adverse effect on subsequent finishing operations.

Outstanding features

- Effective release of plastics and rubber moulded parts
- Thin film - will not affect profiles or interfere with precision fits
- Will not affect subsequent finishing operations
- Silicone free

Item #	Size
R72021	400ml

ROCOL *Moisture Guard Spray*



Moisture Guard is ideal as a colourless, medium/long term indoor corrosion protection of bare metal components and mould tools particularly where condensation is a problem. Normally will not require removal.

- Effective indoor corrosion protection
- Tenacious soft film - easily handled
- Almost dry film - does not attract dirt and dust
- Particularly effective in damp or humid environments
- Available in clear and green formulations

Item #	Size	Type
R69045	400ml	Green
R69025	400ml	Clear

ROCOL *PR Spray*



Rocol PR spray is designed to give fast, efficient clean release in critical moulding applications. It penetrates and spreads to all parts of the most intricate mould to give full, clean release, with improved gloss finish. Rocol PR spray gives a fine, controlled spray with complete coverage for maximum economy. Use on all types of blow, injection, flow and compression moulding, particularly on complex tooling. Helps overcome difficulties encountered during setting and start up.

- Effective release of plastics and rubber moulded parts
- Heat resistant wet film - up to 200°C
- Gives improved gloss finish
- Particularly suited to delicate or intricate parts

Item #	Size
R72015	400ml



ROCOL
Ultracut 370 Plus



Rocol ultracut 370 Plus is a high dilution, semi-synthetic general purpose water mix cutting and grinding fluid formulated to provide optimum performance at high dilutions on a wide range of ferrous and non-ferrous metals. The versatility of Rocol Ultracut 370 Plus enables the user to rationalise to one fluid for both cutting and grinding operations. Rocol ultracut 370 Plus is formulated to provide a long and predictable sump life with inherent resistant to degradation. Forms a translucent green micro-emulsion when mixed with water which provides a clear view of the workpiece.

- Multi purpose cutting and grinding fluid
- High dilution - low sump cost
- Inherently resistant to degradation
- Compatible with hard and soft water
- Suitable for most materials
- Tolerant to tramp oil
- Clean to use
- Excellent residual corrosion protection
- Low foaming

Item #	Size
R51376	5L
R51373	20L

ROCOL
Multisol Cutting Fluid



Rocol multisol is a general purpose water mix cutting fluid suitable for use on a wide range of machines and materials. It is designed for light/medium cutting operations on ferrous and non-ferrous metals. It contains a high percentage of refined mineral oils affording a high degree of residual corrosion protection and lubricity whilst machining. Milky type water mix fluid for all general cutting applications.

- Inhibits corrosion
- Economical in use
- Low odour
- Pleasant and safe to use

Item #	Size
R35226	5L
R35223	20L
R35222	60L

RIDGID
Threading Oil



High grade mineral based oil with surface active technology. Protects dies and improves threads.

- Fast penetrating and cooling
- Suitable for threading most steels and stainless steel materials
- Free from chlorine, silicon and PCB's
- Water washable

Item #	Size
62105	5L
62106	25L